

REAPER



REAPER





一、Packing list

Keyboard case	1
Keyboard body	2
Accessory bag	3
Instruction manual	4
Certificate of Conformity	5
Product instruction card	6
2.4G Receiver	7

二、Gift List

Puller and Key Remover	1
Data cable	2
TOP Screw	3
Leaf spring silicone, 4 pieces	4

一、三模连接	1
--------	---

二、快捷键说明	2
---------	---

三、键盘灯组	3
--------	---

四、点阵屏_屏幕 说明	4
-------------	---


五、键盘快拆	5
--------	---

六、键盘尺寸图	6
---------	---

七、物品清单	7
--------	---





一. 键盘CAPS下面有一个开关，用于切换蓝牙/USB/2.4G模式

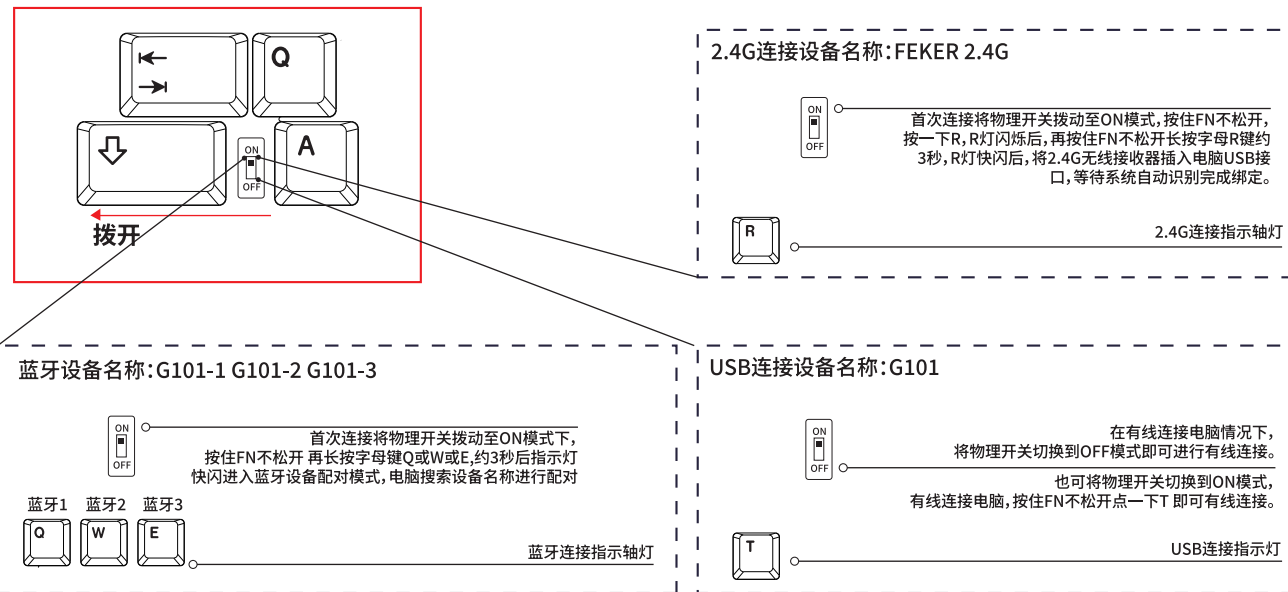


蓝牙连接备注: 通过先按住Fn不松手，再点按字母键Q或W或E去切换蓝牙Q/W/E设备。点按后若灯是快闪则处于配对状态，可搜索到这个蓝牙，若是慢闪，则主动连接曾经连接过的设备，不需要再去搜索。如想重新连接其他设备，则需要长按快捷键(按住Fn不松手再按数字键Q或W或E，大约3秒神)去重新配对。

2.4G连接备注: 在首次连接成功后便与接收器绑定，再次连接，切换与更换新设备不需再次进行绑定作。
指示灯备注: 切换成功时对应键轴灯闪烁，连接成功后，对应键轴灯常亮2秒后恢复原灯效。

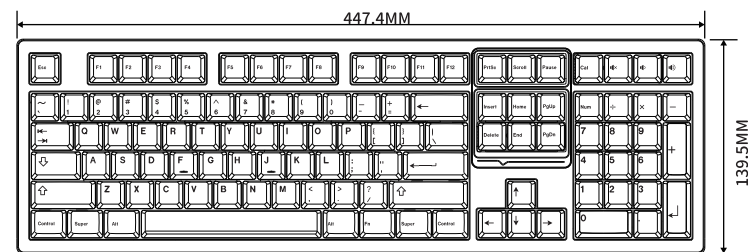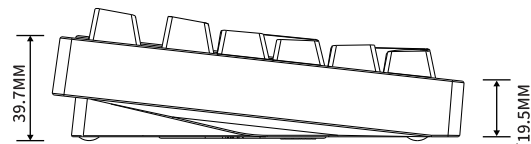


Quick release

1

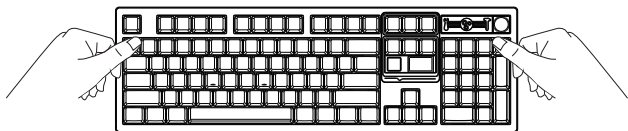

Press the keycap with your thumb, lift the upper part of the keyboard cover with your index finger, and open the switch.

2

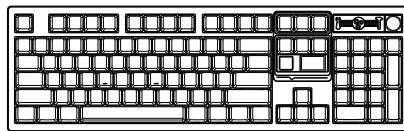

Press the keycap with your thumb, lift the lower part of the keyboard cover with your index finger, open the contact point, and remove the top cover.

Install



Place the top cover in position and press down to complete the installation.

5

一、FN组合快捷键

FN+	F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12	T	BACKSPACE	U	I	O	WIN-L
WIN功能	此电脑	主页	计算器	邮箱	播放器	停止播放	上一曲	播放/暂停	下一曲	音量减	静音	音量加	USB模式	长按恢复出厂设置	DEL	END	PGDN	锁WIN
MAC功能	屏幕亮度减	屏幕亮度加	多任务控制器	程序列表	无	无	上一曲	播放/暂停	下一曲	音量减	静音	音量加						

注：MAC用户切换MAC模式后单按F区即为功能键，无需加上Fn，如需使用F区键则先按FN再按F区。

二、FN组合RGB控制键

FN+	Y	↓	Enter	→	←	↑	↓
	ON/OFF RGB	键盘背光颜色切换	键盘背光灯效切换	灯光速度变快	灯光速度变慢	灯光亮度+	灯光亮度-

三、FN组合点阵屏屏幕控制键

FN+	PRINT	SCRLOCK	PAUSE	PGUP	P	[	]
	屏幕模式切换	动图模式动图切换	点阵模式切换	点阵颜色切换	显示屏功能上翻	显示屏功能下翻	显示屏功能确认

2



键盘灯组 LEDs




Dot matrix display Screen Explanation




- 备注: 1. 键盘支持全键轴灯, 可通过网页驱动和快捷键控制。
2. 键盘大写时CAPS LOCK键下的轴灯亮白色, 小写时恢复原灯效。
3. 键盘低电时, FN键指示灯红灯快闪。键盘充电时, FN键指示灯 红灯常亮开始充电。键盘充满时, FN键指示灯红灯灭掉, 进入默认灯效
4. 键盘锁win键时下的轴灯亮白色, 解锁win时恢复原灯效。

3

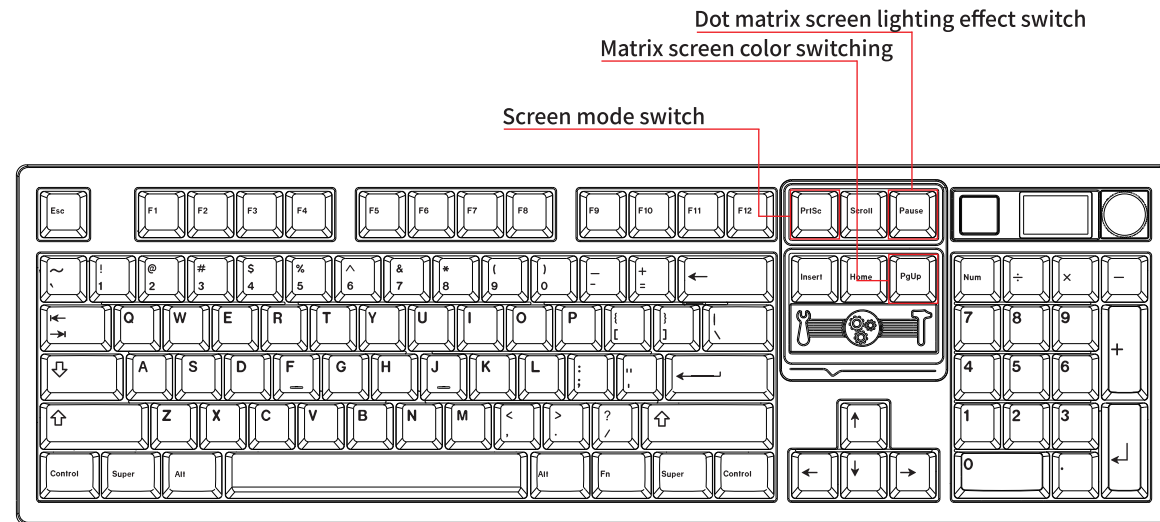

- Note: 1. The dot matrix screen can switch dot matrix light modes by pressing FN first and then pressing PAUSE. Press PGUP to change the dot matrix light color.
2. The screen can switch display modes by pressing FN first and then pressing PRINT.

4

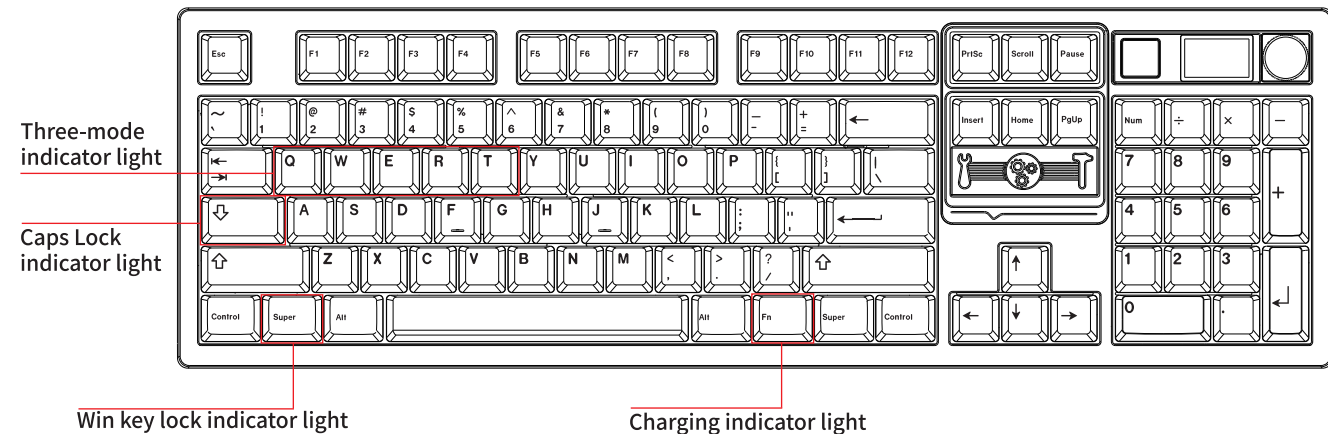


- Note: 1. The keyboard supports full key lighting, which can be controlled via the web driver and shortcut keys.
2. When the keyboard is in uppercase, the key light under the CAPS LOCK key lights up white; when in lowercase, it returns to the original lighting effect.
3. When the keyboard battery is low, the FN key indicator light flashes red quickly. When the keyboard is charging, the FN key indicator light stays red to indicate charging. When the keyboard is fully charged, the FN key indicator light turns off, returning to the default lighting effect.
4. When the Windows key is locked, the key light under it lights up white; when unlocked, it returns to the original lighting effect.



备注: 1. 点阵屏可通过先按FN再点按PAUSE切换点阵灯模式。点按PGUP切换点阵灯颜色。

2. 屏幕可通过先按FN再点按PRINT切换屏幕模式。

一、快拆

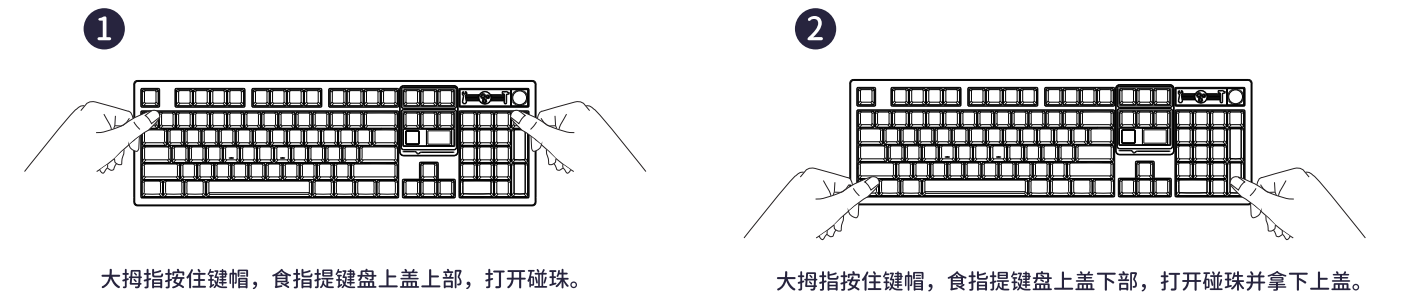

二、安装



FN key combination shortcut

FN+	F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12	T	BACKSPACE	U	I	O	WIN-L
WIN Function	This PC	Home	Calculator	Email	Media Player	Stop playing	Previous song	Play/Pause	Next song	Volume down	Mute	Increase volume	USB Mode	Long press to restore factory settings	DEL	END	PGDN	Lock WIN
MAC Function	Decrease screen brightness	Increase screen brightness	Multitasking controller	Program List	None	None	Previous song	Play/Pause	Next song	Volume down	Mute	Increase volume						

注：MAC用户切换MAC模式后单按F区即为功能键，无需加上Fn,如需使用F区键则先按FN再按F区。

FN Combination RGB Control Key


FN+	Y	↓	Enter	→	←	↑	↓
	ON/OFF RGB	Keyboard backlight color switch	Keyboard backlight effects switching	The speed of the lights increases rapidly	The speed of the lights slows down	Light Brightness+	Light Brightness-

FN combination dot matrix screen control key

FN+	PRINT	SCRLOCK	PAUSE	PGUP	P	[	]
	Screen mode switch	GIF Mode GIF Switch	Dot Matrix Mode Switch	Dot Matrix Color Switch	Display screen flip up	Display screenScroll down function	Display screenFunction confirmation



There is a switch below the keyboard's CAPS key for switching between Bluetooth, USB, and 2.4G modes.

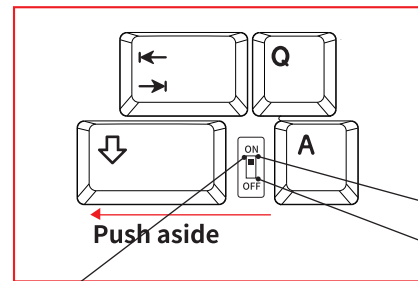

2.4G Connected Device Name: FEKER 2.4G



For the first connection, toggle the physical switch to the ON mode, hold down the FN key without releasing it, press the R key once, after the R light flashes, continue to hold down the FN key and press and hold the R key for about 3 seconds. After the R light flashes quickly, insert the 2.4G wireless receiver into the computer's USB port and wait for the system to automatically recognize and complete the pairing.



2.4G connection indicator shaft light

Bluetooth device name: G101-1 G101-2 G101-3



For the first connection, switch the physical switch to the ON mode. Press and hold the FN key without releasing it, then long-press the letter key Q, W, or E. After about 3 seconds, the indicator light will flash rapidly, entering Bluetooth device pairing mode. Search for the device name on your computer to pair.

Bluetooth1 Bluetooth2 Bluetooth3



Bluetooth connection indicator shaft light

USB Connected Device Name: G101




When the computer is connected via a wired connection, you can switch the physical switch to the OFF mode to use the wired connection.

You can also switch the physical switch to the ON mode, connect the computer via a wired connection, and press the FN key while tapping the T key to establish a wired connection.




USB connection indicator light

侧视图

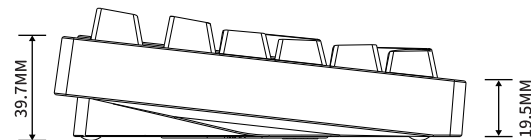

俯视图

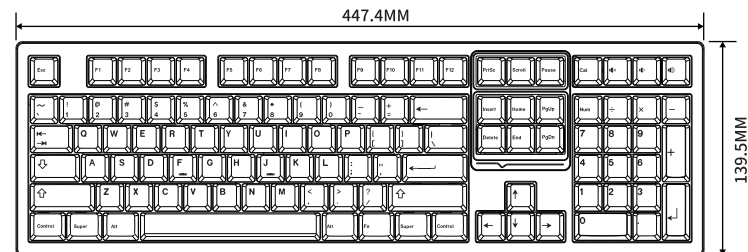

Bluetooth

Connection Note: To switch between Bluetooth Q/W/E devices, first hold down the Fn key without releasing it, and then press the letter key Q, W, or E.

After pressing, if the light flashes quickly, it is in pairing mode and the Bluetooth can be detected. If the light flashes slowly, it will actively connect to a previously connected device, and there is no need to search again. To reconnect to another device, you need to long-press the shortcut key (hold down Fn without releasing and then press the number key Q, W, or E for about 3 seconds) to pair again.

2.4G

Connection Note: After the initial successful connection, it will bind with the receiver. For subsequent connections or when switching and replacing with a new device, there is no need to bind again. Indicator Light Note: When switching is successful, the corresponding key switch light flashes. After a successful connection, the corresponding key switch light stays on for 2 seconds before returning to its original lighting effect.

1

6



一、包装内清单

键盘包	1
键盘本体	2
配件袋	3
说明书	4
合格证	5
产品指示卡	6
2.4G接收器	7

二、赠送清单

拔轴器拔键器	1
数据线	2
TOP螺丝	3
板簧硅胶 4个	4

Triple-mode connection	1
------------------------	---

Keyboard Shortcut Description	2
-------------------------------	---

Keyboard Backlight	3
--------------------	---

Dot matrix screen Screen Explanation	4
--------------------------------------	---

Keyboard quick release	5
------------------------	---

Keyboard size diagram	6
-----------------------	---

Inventory	7
-----------	---