


尺寸:140x100mm
材质:128G铜板纸, 单色印刷, 折叠页



产品参数

产品品牌：FEKER
 产品名称：ALICE98
 产品结构：Gasket结构
 产品尺寸：435.7*156.0*43.5mm
 产品重量：≈1145g
 按键数量：98Key
 连接方式：有线/USB/蓝牙/2.4G
 线材长度：≈1.5M
 接口：接口：键线分体式typec接口
 键程：键程：全键无冲
 背光：背光：全彩RGB
 兼容性：兼容性：Windows7/8/9/10/11/Mac/Linux



Alice98人体工学三模机械键盘

—QMK用户手册—

USER'S MANUAL

说明

APS指示灯白光指示

WIN键白光指示

U盘键白光指示

通过2.4G模式/中间有模式/右推蓝牙模式

当连接到WIN系统，键盘背光闪一次蓝色

当连接到WIN系统，键盘背光闪一次绿色

8、充电/切换指示灯示:

指示灯位置		指示方式
低电	FN指示灯	红灯快闪
充电	FN指示灯	红灯常亮开始充电
充满	FN指示灯	冲满后绿灯常亮60秒后,进入默认圆筒灯发
Mac/Win系统切换	键盘背光	Mac模式:开关接到Mac模式,键盘背光闪一次蓝色 WIN模式:开关接到WIN模式,键盘背光闪一次绿色

9、低电指示:

无续电模式下,检测到电池电压低于3.1V时,进入关机状态,当插上有线充电器,即可恢复正常使用;或者电池电压大于等于3.1V时,即可正常使用。

按键复合功能键说明

1、深度休眠:无

2、省电休眠:键盘无连续操作中3分钟后背光灯关,按任意键唤醒则键盘背光并关闭蓝牙;

3、蓝牙名称: Alice98-1/ Alice98-2/ Alice98-3

2.4G名称: FEKER-2.4G

有线名称: Alice98

灯	回连	配对	连接成功
红灯亮	蓝色常闪	蓝色常闪	常亮3秒后熄灭
红灯亮	绿色常闪	绿色常闪	常亮3秒后熄灭
红灯亮	红色常闪	红色常闪	常亮3秒后熄灭
红灯亮	黄灯常闪	黄灯常闪	常亮3秒后熄灭

- 2 -

灯光效果说明

1. 上电后, 灯光围绕键盘滚动, 拖尾熄灭, 跑完所有按键后, 恢复待机灯光状态。
2. 灯光模式的点亮顺序依表格从上到下, 最后切完模式后有OFF。
3. 灯光效果: 46组灯效

旋钮功能说明


滚轮默认: 按压静音/左V-/右V+

静音	音量增加	音量降低
		

连接功能说明

组合按键	WIN功能	MAC功能 (单按触发)	描述
FN+F1	关闭电脑	屏幕亮度减	按动开关选择MAC / WIN
FN+F2	主页	屏幕亮度加	
FN+F3	计算器	多任务控制键	
FN+F4	邮箱	程序列表	
FN+F5	播放器	无	
FN+F6	停止播放	无	
FN+F7	上一曲	上一曲	
FN+F8	播放/暂停	播放暂停	
FN+F9	下一曲	下一曲	
FN+F10	静音	静音	
FN+F11	音量-	音量-	
FN+F12	音量+	音量+	
FN+BACK	短按一次键盘复位	短按一次键盘复位	键盘背光一次表示
FN+I	键盘背光颜色切换	键盘背光颜色切换	顺序：紫色循环蓝色
FN+Enter	键盘背光灯效切换	键盘背光灯效切换	4种灯效，默认随波逐流

组合按键	WIN功能	MAC功能(单接触发)	描述
FN+右Shift FN+Num)	切换指示灯灯效	切换指示灯灯效	流光/光流/呼吸/常亮/灭。默认流光
FN+Num)	切换鼠标装饰灯灯效	切换鼠标装饰灯灯效	流光/光流/呼吸/常亮/灭。默认流光
FN+空格键	查询电量(无线模式下电源供电有效)	查询电量(无线模式下电源供电有效)	按下组合键FN+空格,背光熄灭,数字显示1800毫安灯显示电量占比,例如1:8,表示10%电量,1和2亮,表示20%电量,以此类推。(30%以下红色,50%以下黄色,50%以下绿色)。
FN+T	键盘背光开关	键盘背光开关	带记忆
FN+WIN+L	锁WIN	无	无
FN+→	灯光速度变慢	灯光速度变慢	根据档位时上左右灯闪烁3次指示
FN+←	灯光速度加快	灯光速度加快	
FN+1	灯光亮度+	灯光亮度+	
FN+1	灯光亮度-	灯光亮度-	
FN+DEL	INS	INS	
FN+PGUP	HOME	HOME	
FN+PGDN	END	END	

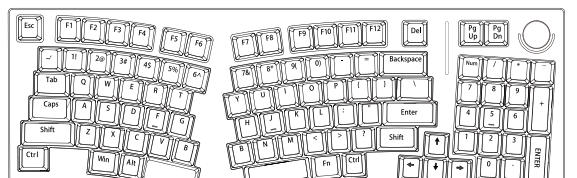Product parameter		Description of switch/indicator light																					
Product brand: FAKER		1. CAPS key indicator light: CAPS key indicator light is indicated by white light 2. Lock win indicator: WIN key indicates white light. 3. NUM indicator: Num key indicates white light. 4. Three-stage switch: Push left 2.4G mode / middle wired mode/push Bluetooth mode right. 5. WIN system switch: switch to WIN system, and the keyboard backlight flashes blue once. 6. MAC system switch: switch to WIN system, and the keyboard backlight flashes green once. 7. Mode connection indicator light:	10. Charging/sleep mode <table border="1"> <tr><td>Indicator</td></tr> <tr><td>Low electricity</td></tr> <tr><td>Charging</td></tr> <tr><td>Full of</td></tr> </table> Mac/Win system switch	Indicator	Low electricity	Charging	Full of																
Indicator																							
Low electricity																							
Charging																							
Full of																							
Product Name: ALICE98		11. Low battery indicator In wireless mode, when the battery is low, the indicator light is plugged in, normal																					
Product structure:gasket structure		Dormancy mode 1. Deep dormancy 2. Power-saving keyboard backlit																					
Product size: 435.7*156.6*43.5mm		3. Product name																					
Product weight: ≈1145g		2.4G name Wired name																					
Number of keys: 98Key		<table border="1"> <thead> <tr> <th>Indicator light settings</th><th>Reconnection</th><th>Pair</th><th>Connection successful</th></tr> </thead> <tbody> <tr> <td>B11 Horizontal light strip</td><td>Blue slow flashing</td><td>Blue slow flashing</td><td>Always on for 3 seconds and then off</td></tr> <tr> <td>B12 Horizontal light strip</td><td>Green slow flashing</td><td>Green slow flashing</td><td>Always on for 3 seconds and then off</td></tr> <tr> <td>B13 Horizontal light strip</td><td>Red slow flashing</td><td>Red slow flashing</td><td>Always on for 3 seconds and then off</td></tr> <tr> <td>2.4G Horizontal light strip</td><td>Yellow light flashing slowly</td><td>Yellow light flashing slowly</td><td>Always on for 3 seconds and then off</td></tr> </tbody> </table>	Indicator light settings	Reconnection	Pair	Connection successful	B11 Horizontal light strip	Blue slow flashing	Blue slow flashing	Always on for 3 seconds and then off	B12 Horizontal light strip	Green slow flashing	Green slow flashing	Always on for 3 seconds and then off	B13 Horizontal light strip	Red slow flashing	Red slow flashing	Always on for 3 seconds and then off	2.4G Horizontal light strip	Yellow light flashing slowly	Yellow light flashing slowly	Always on for 3 seconds and then off	
Indicator light settings	Reconnection	Pair	Connection successful																				
B11 Horizontal light strip	Blue slow flashing	Blue slow flashing	Always on for 3 seconds and then off																				
B12 Horizontal light strip	Green slow flashing	Green slow flashing	Always on for 3 seconds and then off																				
B13 Horizontal light strip	Red slow flashing	Red slow flashing	Always on for 3 seconds and then off																				
2.4G Horizontal light strip	Yellow light flashing slowly	Yellow light flashing slowly	Always on for 3 seconds and then off																				
Connection method: Wired -USB/ Bluetooth /2.4G																							
Wire length: ≈1.5M																							
Interface: Keyframe separation type C interface																							
Matrix: Full key no impact																							
Backlight: Full color RGB,																							
Compatibility: Windows7/8/9/10/11/Mac/Linux																							

Function switching indicator light:		Indicator method
Indicator light settings		
FN indicator light	Red light flashing fast	
FN indicator light	The red light is constantly on and charging begins	
FN indicator light	After being fully charged, the green light will remain on for 60 seconds before entering the default running light effect	
Switching	Keypad backlight	MAC mode: Switch to MAC mode, keyboard backlight flashes blue once WIN mode: Switch to WIN mode, keyboard backlight flashes green once

Mode connection description

- 1. Wired connection**

When the switch is set to the middle gear, it is the wired connection mode: Wired mode, toggle switch to middle gear, USB plug and play.
- 2. Wireless bluetooth connection**

When the switch is set to Bluetooth, the way to connect Bluetooth is as follows
FN+Q/W/E: After the keyboard dial the Bluetooth file, press FN+Q/W/E to enter the Bluetooth loopback mode, and press and hold the code combination of FN+Q/W/E for 3S, and the keyboard will enter the code alignment state, and the blue/green/red indicator light will flash and connect. The rear indicator light is always on for 3S. After the pairing device cannot be found for 30S, the code-checking mode exits, the light goes out and the keyboard goes to sleep.
- 3. 2.4G wireless connection**

Plug the attached 2.4G wireless receiver into the USB interface of the computer host, and then turn the keyboard side switch to the wireless connection mode to use the drive-free connection.
FN+R: After the keyboard dial the 2.4G mode, press FN+R to enter the 2.4G loopback mode, and then press the FN+R combination key to enter the pairing mode, and then the indicator light flashes, plugged into the receiver, and exited after the pairing was successful. For code checking, the mode light is always on for 3S, and after the pairing device cannot be found for 30S, the code checking mode is exited, and the keyboard goes to sleep.

Note: The device can be charged by connecting USB cable in any wireless mode.

- 12 -

Compound function description			Key code
Combination buttons	WIN function	MAC function (single press trigger)	Description
FN+F1	This computer	Screen brightness decrease	Flip the switch to select MAC/WIN
FN+F2	Homepage	Screen brightness increase	
FN+F3	Calculator	Multi task controller	
FN+F4	Mailbox	Program List	
FN+F5	Player	Nothing	
FN+F6	Stop playing	Nothing	
FN+F7	Stop playing	Previous song	
FN+F8	Play/Pause	Play pause	
FN+F9	Next song	Next song	
FN+F10	Mute	Mute	
FN+F11	Volume -	Volume -	
FN+F12	Volume +	Volume +	
+BACKSPACE		Short press reset	Keyboard backlight goes out once.
FN+I	Keyboard backlight color switching	Keyboard backlight color switching	Order: Monochrome Loop Gradient

Compound function description			Describe
Initiation buttons	WIN function	MAC function (single press trigger)	
FN+F Enter	Keyboard backlight effect switching	Keyboard backlight effect switching	4 lighting effects, default to follow the flow
FN+Right Shift	Switching indicator light effects	Switching indicator light effects	Streamers/Spectrum/Breathing/Always On/OFF Default Streamer
FN+*(NUM)	Switching knob deceleration strap lamp effect		Streamer/Spectrum/Breathing/Always On/OFF Default Streamer
	Check battery level (valid battery power in wireless mode)	Check battery level (valid battery power in wireless mode)	Press the combination key FN+space, the backlight will turn off, and the number keys 1 to 0 will light up to display the proportion of battery, for example: 1 is on, indicating 10% battery, 1 and 2 are on, indicating 20% battery. And so on. (Red below 30%, yellow below 50%, green above 50%).
	Keyboard backlight switch	Keyboard backlight switch	With memory
FN+WIN+L	Lock WIN	---	---
FN+→	Light speed slows down	Light speed slows down	

Combination buttons	WIN function	MAC function (single press trigger)	Describe
FN++	Accelerated lighting speed	Accelerated lighting speed	When in the extreme gear position, the up, down, left, and right lights flash three times to indicate
FN+↑	Light brightness+	Light brightness+	
FN+↓	Light brightness-	Light brightness-	
FN+DEL	INS	INS	
FN+PGUP	HOME	HOME	
FN+PGDN	END	END	

产品质保

感谢您对FEKER产品的信任和支持，为了让您放心使用本产品，更好的保证您的权益。我们将严格遵守并执行相关规定，实行售后。

1、服务有效期：自购买之日起总量保证12个月，终生维护，配件不在保修范围内；
2、服务内容：按典型计算机商品维修更换责任规定提供服务；
3、不属于质保范围：
a.已超出有效服务或免费维修期限的；
b.未按图正确识别使用、维护、保管导致故障或损坏的；
c.由于不可抗力（如自然灾害等）原因造成的产品之不良；
d.人为因素导致产品不良（如操作失误、碰撞、进水、输入不合法信息等）；
e.一切人为损坏、自行拆卸、封拆标、使用不当等，不在保修范围。

合格证



检验员：

日期：

更多产品信息请关注
FEKER官网：
<https://www.fekergaming.com>